JOSKIN®

www.joskin.com

WAGO RANGE

BALE TRAILERS AND LOW LOADERS

3 year warranty

Conditions on request.

A complete range with many equipment options possible

Range of Bale Trailers

JOSKIN offers a range of WAGO bale trailers **designed to ensure maximum load security**, manoeuvrability and driving comfort.

Trailed WAGO Bale Trailers

8 m - 10 t - painted

8 m - 14 t - painted or galvanised

10 m - 14 t - painted

10 m - 21 t - painted or galvanised

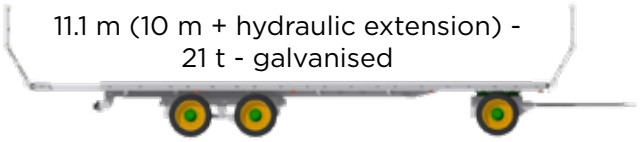
11.1 m (10 m + hydraulic extension) - 21 t - galvanised

11.7 m - 21 t - painted or galvanised

Semi-Mounted WAGO Bale Trailers

6 m - 7 t - painted

8 m - 14 t - painted or galvanised

10 m - 14 t - painted or galvanised

10 m - 24 t - painted or galvanised

11.1 m (10 m + hydraulic extension) - 24 t - galvanised

11.7 m - 24 t - painted or galvanised

Painted or Galvanised WAGO - Floor in Folded Sheet or Chequered Plate

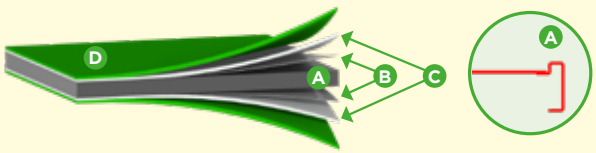

2-component paint protection

(A) Floor in chequered plate with a 2.5 cm edge to better hold the load.
(B) Automatic shot-blasting with 20 turbines (2,300 kg shot/min).
(C) 2K primer coat applied directly after blasting + flash-off before applying the finish.
(D) 2K topcoat with accelerated drying at 60°C.

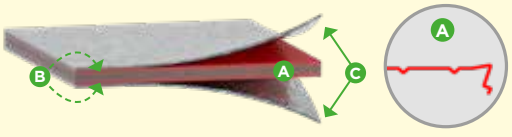

Galvanised protection

(A) Floor in folded high tensile steel sheet (thickness: 4 mm).
(B) Core penetration of zinc in steel at 450°C.
(C) 70-micron galvanising with special treatment before and after immersion in the zinc bath.

Range of Low Loaders

The **WAGO-Loader** low loaders are designed to transport heavier loads (implements, machinery, etc.) and combine **simplicity, sturdiness and safety**.

Semi-Mounted WAGO-Loader

8 m - 14 t - telescopic ramp (+ 1.25 m)

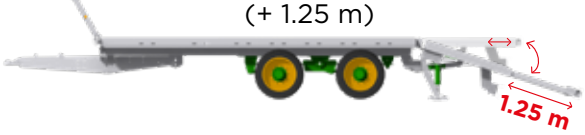

8 m - 14 t - manual aluminium or hydraulic ramps

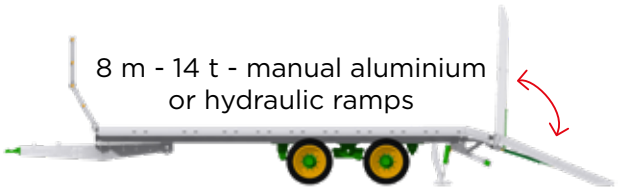

10 m - 14 t - telescopic ramp (+ 1.25 m)

9.9 m - 24 t - manual aluminium or hydraulic ramps

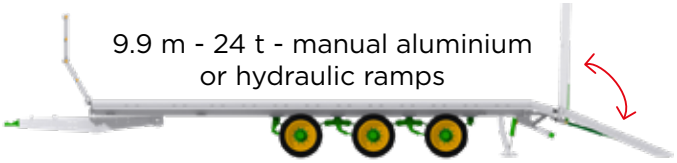

Trailed WAGO-Loader

8 m - 14 t - manual aluminium or hydraulic ramps

9.9 m - 21 t - manual aluminium or hydraulic ramps

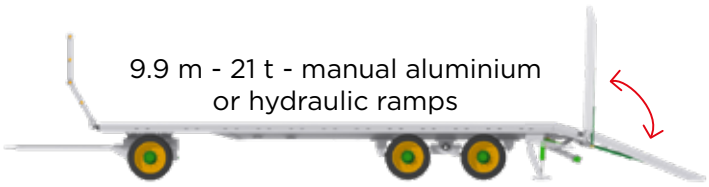

9.9 m - 14 t - manual aluminium or hydraulic ramps

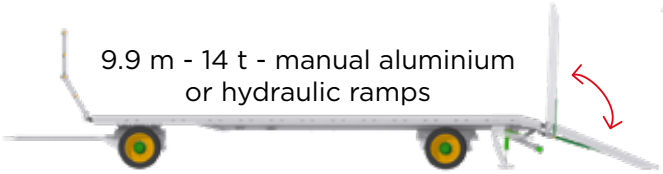

Galvanised WAGO-Loader - Wooden Floor

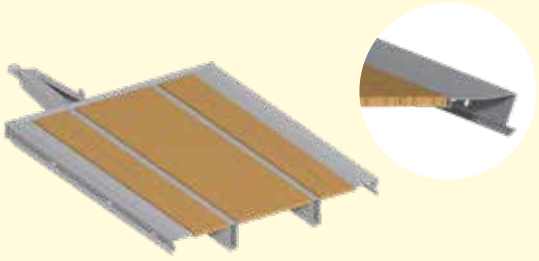

3.5 cm thick treated **hardwood floor** on all WAGO-Loader low loaders.

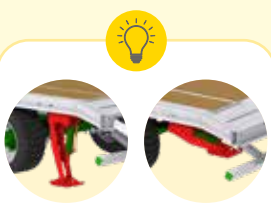

2 hydraulic rear stands with wide skids, standard on all WAGO-Loader.

Hydraulic central stand retractable inside the drawbar with a wide skid, standard on semi-mounted WAGO.

The LOWEST bale trailers and low loaders on the market!

The WAGO bale trailers and low loaders (WAGO-Loader) are designed to have the lowest centre of gravity possible.

The standard floor height **does not exceed 1.1 m** with the standard wheels (445/45R19.5).

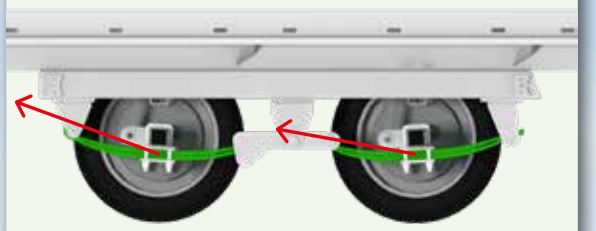

The suspension leaves under the axles limit the trailer height and facilitate traction.

Comfort and Sturdiness

At JOSKIN, particular attention is paid to the user comfort. The structure of the WAGO trailers is also extremely resistant to ensure a long service life.

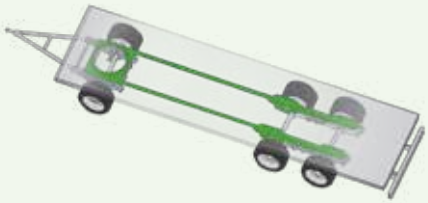

The chassis of all JOSKIN bale trailers and low loaders is made of a **high tensile steel tubular structure** to improve the resistance to torsion.

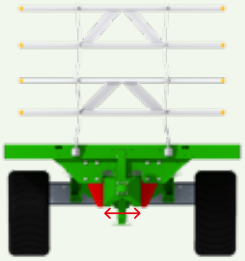

SEMI-MOUNTED

Narrow drawbar with central hydraulic parking stand and **leaf suspension with self-lubricating ertalon guide**.

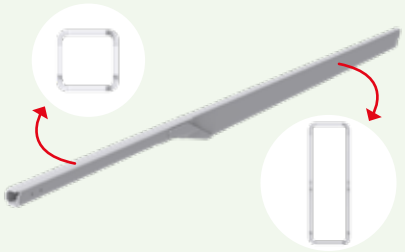

TRAILED

Oversized tubular reinforcement for the chassis (120 x 120 mm front section, 300 x 100 mm rear section).

Ladders and Extensions for a Safe Transport

With the safety of the user and other road users at the heart of JOSKIN's concerns, various solutions are proposed to **secure the load**.

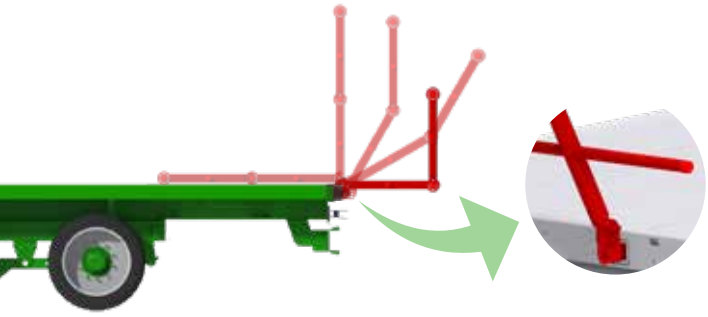

Removable, multiposition **front and rear ladders**.

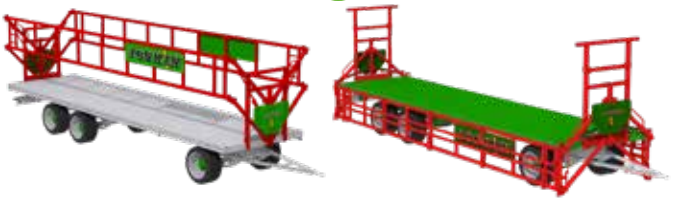

OPTION: retractable side ladders with front and rear supports (only available on 8 m and 10 m models, including on WAGO-Loader with manual ramps or telescopic ramp).

Patented, Self-Unfolding Extensions for Side Ladders

As an option, (mechanical and automatic) self-unfolding extensions can be added to the side ladders to secure the upper bales whatever their height (70 to 120 cm).

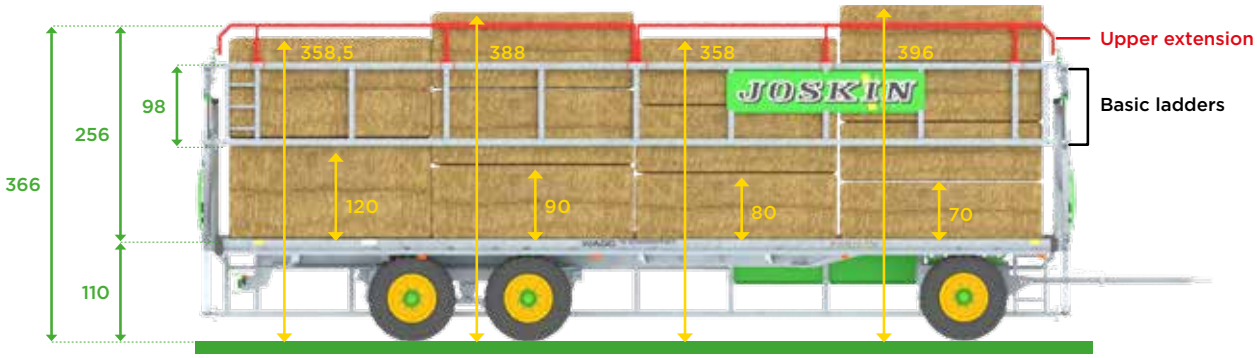

*Approximate heights **in cm**, variable according to the wheel type.*

Even more safety...

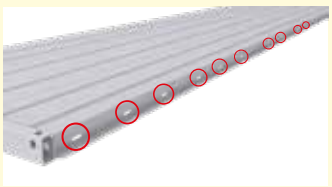

Galvanised WAGO and WAGO-Loader
Lashing points

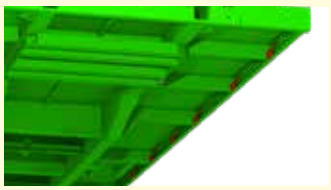

Painted WAGO
Lashing points



Galvanised and painted WAGO
2 possible strap tensioners at the back

WAGO and WAGO-Loader
Bolted front wall

Advantages Specific to WAGO or WAGO-Loader

Although they have many points in common, the JOSKIN bale trailers and low loaders have some **advantages specific to their use**.

WAGO: a Galvanised Bale Trailer with 3 Standardised Solutions

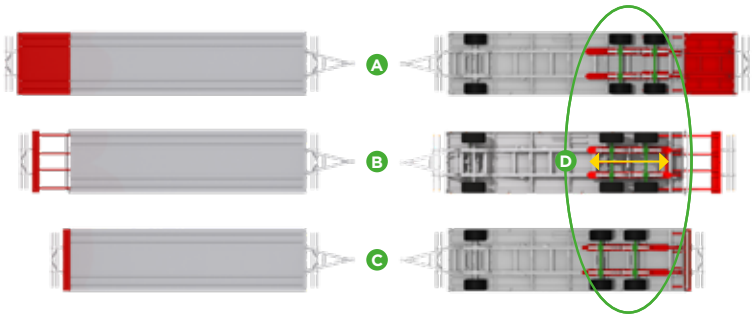

(A) 9.6 m + 2.1 m = 11.7 m
(B) 10 m + 1.1 m hydraulic extension = 11.1 m
(C) 9.6 m + 0.4 m = 10 m
(D) Adjustable tandem position for 10 and 12 m trailers

WAGO-Loader: a Galvanised Low Loader with 3 Types of Ramps

Hydraulic ramps

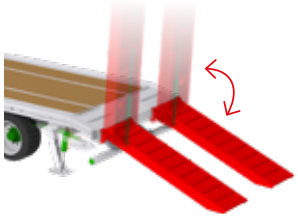

Manual aluminium ramps

1.25 m telescopic ramp

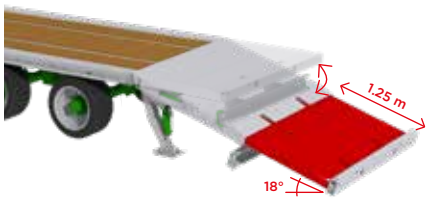

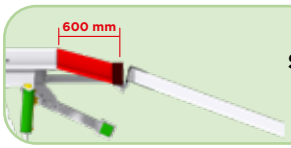

Sloping extension on all 8 and 10 m trailed and semi-mounted models with hydraulic or manual ramps.

Find out more and configure your bale trailer or low loader in just a few clicks!

WAGO

WAGO LOADER

JOSKIN

WIDE RANGE OF BALE TRAILERS & LOW LOADERS

WAGO

✓ Range from 6 to 11.7 meters
✓ Trailed or semi-mounted models
✓ Galvanised or green-painted protection
✓ Front/rear ladders or retractable side ladders

WAGO-LOADER

✓ Range from 8 to 10 meters
✓ Trailed or semi-mounted models
✓ Galvanised protection
✓ Manual or hydraulic ramps or telescopic ramp

JOSKIN

www.joskin.com
Rue de Wergifosse, 39 - 4630 Soumagne (Belgium)
E-mail: info@joskin.com • Tel.: +32 (0)4 377 35 45

Scan the QR code to find out more about JOSKIN and discover the full range!

Non-contractual document. Data can be modified without prior notice. Pictures do not necessary correspond to the standard equipment.